




Lubricants



Intelligent Air Technology

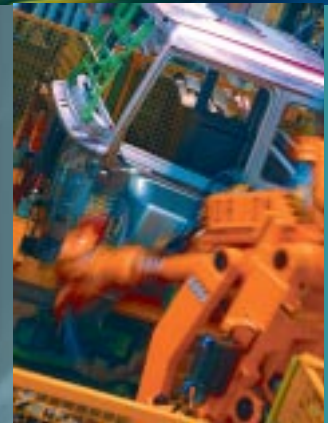

CompLube "10" The Ultimate Air Compressor Lubricant

CompLube "10" is an advanced synthetic PAO/complex ester-based lubricant coupled with state-of-the-art additives. This lubricant has excellent oxidative stability leading to a 12,000 hour service life rating.

In addition, CompLube "10" features excellent resistance to high temperature operating conditions. The results are superior resistance to varnish or sludge formations. CompLube "10" has a high flash point and excellent thermal stability.

One of the best features of the CompAir lubricants in these environment conscious times is its ability to readily separate itself from water. This allows the water from your oil/water separator to be sent directly into a wastewater stream for treatment.

This is the same lubricant that allows us to offer our compressor customers a ten year air end Performance Warranty Plan.



SSL-46 Plus

SSL-46 Plus is a synthetic PAO based lubricant with an 8,000 hour rated service life. It has good stability at high temperatures, excellent water separation and very good thermal stability. Our compressor customers use this oil to maintain their CompAir five year air end Performance Warranty Plan.



SSL-35F Food Grade Lubricant

The CompAir SSL-35F lubricant is specially formulated to meet the USDA H-1 requirement. It also meets FDA CFR 178.3570 guidelines for lubricants with incidental food contact.

If your compressed air makes contact with your food processing operation, the SSL-35F is the lubricant for you.

The SSL-35F is a synthetic PAO based lubricant with a rated service life of 4,000 hours. It has excellent water separation characteristics, low volatility, low pour point and a high flash point.

Uses include: meat and poultry processing plants, bakeries, food container manufacturing, etc. Our compressor customers use this oil to maintain their CompAir five year air end Performance Warranty Plan.



SSL-50

Our Standard Rotary Screw Lubricant

The SSL-50 is our standard compressor oil. All CompAir stationary screw compressors are shipped with this lubricant (unless otherwise requested). SSL-50 is a blend of PAO and severely hydrotreated base fluids that is cost-effective for those customers that do not mind changing oil more frequently. The SSL-50 is rated for 4,000 hours of service life; this is two to four times the life of mineral oils. It also has great water separation ability. It is less volatile than mineral oils and has a low oil carry over through the oil separator. The lubricant service life is based on an operating temperature of 190°F and a discharge pressure of 100 psi g, with pure air.



CS600

Rotary Vane Compressor Lubricant

CS600 is a polyalphaolefin/ester blend specifically formulated for Rotary Vane Compressors. This is an extended-life lubricant for use in vane compressors operating under harsh service conditions with high compression temperatures. CS600 is known for its extremely low volatility, outstanding low temperature properties, excellent corrosion protection and oxidative stability. CS600 has a service life rating of 4,000 hours and has excellent wear characteristics.

CS600 is made from the highest quality base stocks coupled with state-of-the-art additive technology resulting in performance improvements beyond mineral oil and other synthetic air compressor lubricants.

Using this lubricant allows customers to take advantage of CompAir's five year air end Performance Warranty Plan for Rotary Vane Compressors.

CS600 has exceptional thermal stability and superior demulsibility among other outstanding benefits.



CS300

Rotary Vane Compressor Lubricant

CS300 is a diester based lubricant, the standard lubricant in CompAir Rotary Vane Compressors, except the RS compressor at 150 psi units. CS300 offers superior condensate separation and performs over a wide temperature range.



Consult your local distributor for complete technical information on CompAir Lubricants.

Intelligent Air Technology

Compressed air solutions for every application

Compressors

Up to 2,750 cfm

1 - 604 hp

Up to 6,000 psi

Lubricated

Rotary Vane

Single-Stage Screw

Two-Stage Screw

Speed Regulated Screw

Piston

Portable

Oil-Free

Two-Stage Screw

Water-Sealed Screw

Piston

Portable

Complete Accessories Program

Filters and Dryers

Cooling Systems

Heat Recovery

Condensate Management

Air Receivers

Multi-Set Controllers

Lubricants

Value Added Services

Air Audit

Performance Reporting

Utility Air

Performance Contracting

Complete Service for Compressed Air Technology

Engineering of Complete Compressor Stations

Local Service Centers

Guaranteed Parts Availability



CompAir
P.O. Box 927
211 East Russell Road
Sidney, Ohio 45365-0927
USA

Telephone: (937) 498-2500
Fax: (937) 492-3923

www.CompAirUSA.com
Email sales@CompAirUSA.com



CompAir policy is one of continuous improvement and we therefore reserve the right to alter specifications and prices without prior notice. All products are sold subject to the Company's conditions of sale.

Brochure re-order ref: 98700-522

COM0283_3000_9/03



CompAir is an ISO 9001 registered company